



## iCafe Client Software

### iCafe Client Setup

After the iCafe Client Software and smart card readers have been installed, you will be prompted with an iCafe dialog window to set up the iCafe Client System Configurations.

The screenshot shows the 'iCafe Client Setup' dialog box with the following fields and options:

- Username:** icafe user. Description: Username will need to match username on each card.
- User Type:** Guests (dropdown). Description: Select the type of user to create.
- Password:** \*\*\*\*\*. Description: Password will need to match password on each card.
- Location ID:** 01. Description: Enter the Location ID of your cafe (optional).
- Server IP Address:** 192.168.0.106. Description: Enter the IP Address of the computer running iCafe Manager.
- Server Port:** 9555. Description: Enter the Port Number of the computer running iCafe Manager.
- Reader Selection:** SCM Microsystems Inc. SCR331-DI USB Smart Card Reader 0 (dropdown). Description: Select the reader model of the reader to be used with iCafe on this PC. It is important to choose the correct reader. If the incorrect reader is chosen the iCafe client software will not work correctly.

**Messages:** Roll your mouse over each box to see a description of each.

Log On	Log Off	Welcome	<b>Demographic</b>
--------	---------	---------	--------------------

You can earn valuable rewards and bonuses in Internet access time by signing up for an iCafe loyalty account. The more you use your iCafe cards the faster you can earn rewards. After hours of Internet access time, you will receive hours of bonus Internet access time loaded to your card automatically.

Buttons: Reset, Next >>

## System Configuration

The iCafe Client System Configuration window is used to set up the usernames, passwords and all other global settings for the user PCs.

**Username & Password**—Enter the exact same Username and Password that you set up in the iCafe Manager Software.

**User Type**—Select the type of user to create (Guests, Users, Power Users).

**Location ID**—Designed for owners with more than one store location, enter your Location ID number—used to track which cards were operated in which stores.

**Server IP Address & Server Port**—Enter the Server IP Address and Server Port number for the PC running the iCafe Manager software.

**Reader Selection**—Select the reader model which will be used with the Client PCs.

**Message Text**—Set the text messages that you want to appear during Log On, Log Off, Welcome and when demographic info is requested.


# iCafeCard

## SOFTWARE OVERVIEW



### iCafe Client Software Customized Text Message Screens

#### LOG ON SCREEN

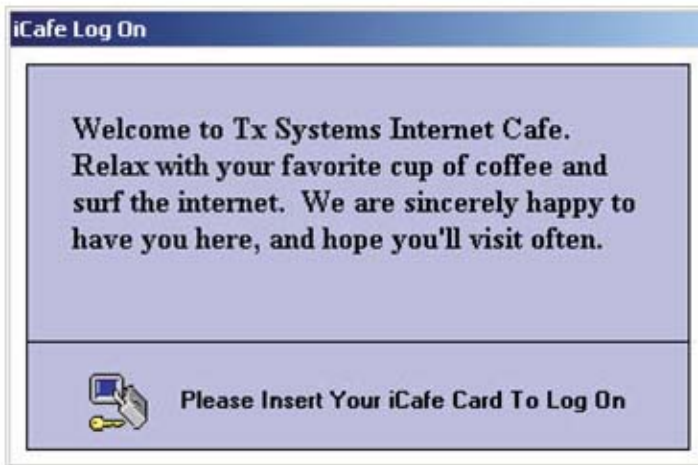


The Log On screen will appear on every PC that is currently not in use.

#### DEMOGRAPHIC SCREEN

A screenshot of a "Customer Information" form. It includes a sign-up instruction: "Sign up for a user account to earn bonus points that can be used for free items or internet access time, or just provide your contact info to be notified of upcoming events and specials." The form has fields for Name (with "First Last" labels), Email (with "email@yahoo.com" as a placeholder), Address, City, State (a dropdown menu), ZIP, and Phone (with "(123) 456-7890" as a placeholder). At the bottom are three buttons: "Create account \*\*", "No account, just save info", and "Skip". A small note at the very bottom says: "\*\* Note: If you are a repeat customer and have already created an account, but are using a new card, you must input your information again to personalize this card for use with the iCafe customer database."

After the user inserts their iCafe card, they are prompted to enter in their personal information (name, email, and address).

#### WELCOME SCREEN

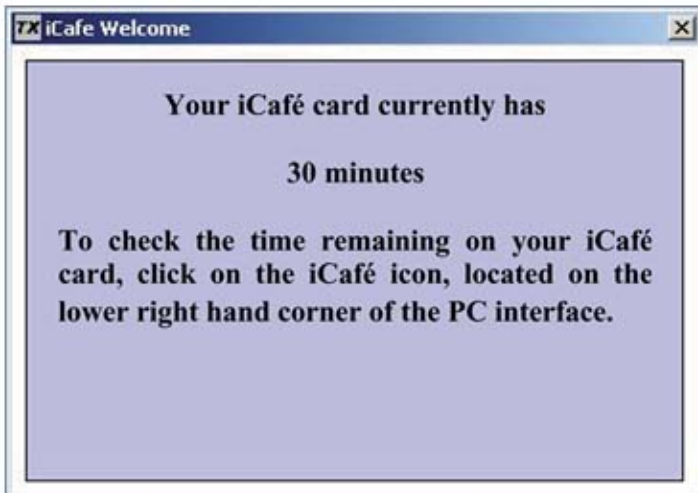

The Welcome screen appears after the customer inserts their iCafe card, notifying the user how much time remains on the card.

#### LOG OFF SCREEN



When time expires on the iCafe card, a Log Off screen appears, alerting the customer that the time on the card has expired.